


2 Kg Carbon Dioxide Alloy Fire Extinguisher

Features

- ✓ Portable
- ✓ Class B & Electrical fires



A portable 2 Kg carbon dioxide alloy extinguisher for class B and electrical fires.




Specification

Extinguisher Code	CS2SH
Extinguishant	Carbon Dioxide CO ₂
Propellant Type	Stored Pressure
Capacity	2 Kg
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	Black (RAL 9005)
Fire Class	B Type & Electrical
Fire Rating	34B
Operating Temperature	-20°C to +60°C
Test Pressure	212 Bar
Operating Pressure at 20°C	50 Bar
Discharge Duration	10 sec
Discharge Range	3 m
Cylinder	Aluminium Alloy BS 5045 Part 3
Operating Valve	Brass Hot Stamping
Discharge Nozzle	Swivel Horn
Height	500 mm
Diameter	117 mm
Full Weight	5.2 kg
Nominal Carton Size	170 x 145 x 550 mm
Approval	BS EN3

Spare Parts

Item	Description	Part No.
A	Swivel Horn and Elbow	MBC 010
B	Brass Tapered Valve	MVLV 0015
C	Safety Pin and Ring	MBC055
-	Pull Tight Seal (not shown)	XE 18798
-	Wall Bracket (not shown)	MBRH 0540

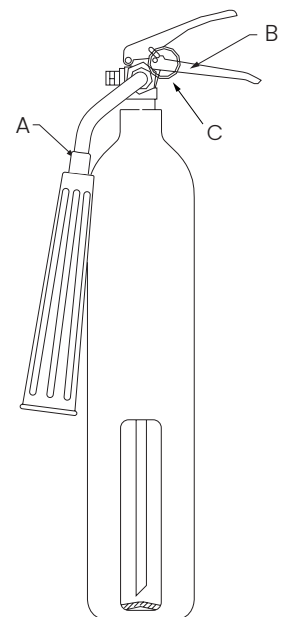

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

